


# LM158, LM158A, LM258, LM258A LM358, LM358A, LM2904, LM2904V DUAL OPERATIONAL AMPLIFIERS


SLOS068R – JUNE 1976 – REVISED JULY 2010

- **Wide Supply Range:**
  - Single Supply . . . 3 V to 32 V (26 V for LM2904)
  - or Dual Supplies . . .  $\pm 1.5$  V to  $\pm 16$  V ( $\pm 13$  V for LM2904)
- **Low Supply-Current Drain, Independent of Supply Voltage . . . 0.7 mA Typ**
- **Common-Mode Input Voltage Range Includes Ground, Allowing Direct Sensing Near Ground**
- **Low Input Bias and Offset Parameters:**
  - Input Offset Voltage . . . 3 mV Typ  
A Versions . . . 2 mV Typ
  - Input Offset Current . . . 2 nA Typ
  - Input Bias Current . . . 20 nA Typ  
A Versions . . . 15 nA Typ
- **Differential Input Voltage Range Equal to Maximum-Rated Supply Voltage . . . 32 V (26 V for LM2904)**
- **Open-Loop Differential Voltage Amplification . . . 100 V/mV Typ**
- **Internal Frequency Compensation**

LM158, LM158A . . . JG PACKAGE  
LM258, LM258A . . . D, DGK, OR P PACKAGE  
LM358 . . . D, DGK, P, PS, OR PW PACKAGE  
LM358A . . . D, DGK, P, OR PW PACKAGE  
LM2904 . . . D, DGK, P, PS, OR PW PACKAGE  
(TOP VIEW)



LM158, LM158A . . . FK PACKAGE  
(TOP VIEW)

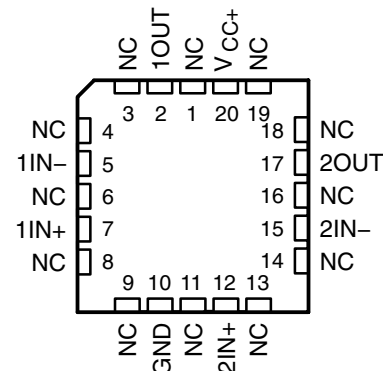

NC – No internal connection

## description/ordering information

These devices consist of two independent, high-gain frequency-compensated operational amplifiers designed to operate from a single supply over a wide range of voltages. Operation from split supplies also is possible if the difference between the two supplies is 3 V to 32 V (3 V to 26 V for the LM2904), and  $V_{CC}$  is at least 1.5 V more positive than the input common-mode voltage. The low supply-current drain is independent of the magnitude of the supply voltage.

Applications include transducer amplifiers, dc amplification blocks, and all the conventional operational amplifier circuits that now can be implemented more easily in single-supply-voltage systems. For example, these devices can be operated directly from the standard 5-V supply used in digital systems and easily can provide the required interface electronics without additional  $\pm 5$ -V supplies.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

**TEXAS  
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 2010, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

**LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS**

SLOS068R – JUNE 1976 – REVISED JULY 2010

**ORDERING INFORMATION<sup>†</sup>**

| <b>T<sub>A</sub></b> | <b>V<sub>IO</sub>max<br/>AT 25°C</b> | <b>MAX<br/>TESTED<br/>V<sub>CC</sub></b> | <b>PACKAGE<sup>‡</sup></b> |              | <b>ORDERABLE<br/>PART NUMBER</b> | <b>TOP-SIDE<br/>MARKING</b> |
|----------------------|--------------------------------------|------------------------------------------|----------------------------|--------------|----------------------------------|-----------------------------|
| 0°C to 70°C          | 7 mV                                 | 30 V                                     | PDIP (P)                   | Tube of 50   | LM358P                           | LM358P                      |
|                      |                                      |                                          | SOIC (D)                   | Tube of 75   | LM358D                           | LM358                       |
|                      |                                      |                                          |                            | Reel of 2500 | LM358DR                          |                             |
|                      |                                      |                                          |                            | Reel of 2500 | LM358DRG3                        |                             |
|                      |                                      |                                          | SOP (PS)                   | Reel of 2000 | LM358PSR                         | L358                        |
|                      |                                      |                                          | TSSOP (PW)                 | Tube of 150  | LM358PW                          | L358                        |
|                      |                                      |                                          |                            | Reel of 2000 | LM358PWR                         |                             |
|                      |                                      |                                          |                            | Reel of 2000 | LM358PWRG3                       |                             |
|                      |                                      |                                          | MSOP/VSSOP (DGK)           | Reel of 2500 | LM358DGKR                        | M5_§                        |
|                      | 3 mV                                 | 30 V                                     | PDIP (P)                   | Tube of 50   | LM358AP                          | LM358AP                     |
|                      |                                      |                                          | SOIC (D)                   | Tube of 75   | LM358AD                          | LM358A                      |
|                      |                                      |                                          |                            | Reel of 2500 | LM358ADR                         |                             |
|                      |                                      |                                          | TSSOP (PW)                 | Tube of 150  | LM358APW                         | L358A                       |
|                      |                                      |                                          |                            | Reel of 2000 | LM358APWR                        |                             |
|                      |                                      |                                          | MSOP/VSSOP (DGK)           | Reel of 2500 | LM358ADGKR                       | M6_§                        |
| –25°C to 85°C        | 5 mV                                 | 30 V                                     | PDIP (P)                   | Tube of 50   | LM258P                           | LM258P                      |
|                      |                                      |                                          | SOIC (D)                   | Tube of 75   | LM258D                           | LM258                       |
|                      |                                      |                                          |                            | Reel of 2500 | LM258DR                          |                             |
|                      |                                      |                                          |                            | Reel of 2500 | LM258DRG3                        |                             |
|                      |                                      |                                          | MSOP/VSSOP (DGK)           | Reel of 2500 | LM258DGKR                        | M2_§                        |
|                      | 3 mV                                 | 30 V                                     | PDIP (P)                   | Tube of 50   | LM258AP                          | LM258AP                     |
|                      |                                      |                                          | SOIC (D)                   | Tube of 75   | LM258AD                          | LM258A                      |
|                      |                                      |                                          |                            | Reel of 2500 | LM258ADR                         |                             |
|                      |                                      |                                          | MSOP/VSSOP (DGK)           | Reel of 2500 | LM258ADGKR                       | M3_§                        |
| –40°C to 125°C       | 7 mV                                 | 26 V                                     | PDIP (P)                   | Tube of 50   | LM2904P                          | LM2904P                     |
|                      |                                      |                                          | SOIC (D)                   | Tube of 75   | LM2904D                          | LM2904                      |
|                      |                                      |                                          |                            | Reel of 2500 | LM2904DR                         |                             |
|                      |                                      |                                          |                            | Reel of 2500 | LM2904DRG3                       |                             |
|                      |                                      |                                          | SOP (PS)                   | Reel of 2000 | LM2904PSR                        | L2904                       |
|                      |                                      |                                          | TSSOP (PW)                 | Tube of 150  | LM2904PW                         | L2904                       |
|                      |                                      |                                          |                            | Reel of 2000 | LM2904PWR                        |                             |
|                      |                                      |                                          |                            | Reel of 2000 | LM2904PWRG3                      |                             |
|                      |                                      |                                          | MSOP/VSSOP (DGK)           | Reel of 2500 | LM2904DGKR                       | MB_§                        |
|                      | 7 mV                                 | 32 V                                     | SOIC (D)                   | Reel of 2500 | LM2904VQDR                       | L2904V                      |
|                      |                                      |                                          | TSSOP (PW)                 | Reel of 2000 | LM2904VQPWR                      | L2904V                      |
|                      | 2 mV                                 | 32 V                                     | SOIC (D)                   | Reel of 2500 | LM2904AVQDR                      | L2904AV                     |
|                      |                                      |                                          | TSSOP (PW)                 | Reel of 2000 | LM2904AVQPWR                     | L2904AV                     |
| –55°C to 125°C       | 5 mV                                 | 30 V                                     | CDIP (JG)                  | Tube of 50   | LM158JG                          | LM158JG                     |
|                      |                                      |                                          | LCCC (FK)                  | Tube of 55   | LM158FK                          | LM158FK                     |
|                      | 2 mV                                 | 30 V                                     | CDIP (JG)                  | Tube of 50   | LM158AJG                         | LM158AJG                    |
|                      |                                      |                                          | LCCC (FK)                  | Tube of 55   | LM158AFK                         | LM158AFK                    |

<sup>†</sup> For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).

<sup>‡</sup> Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

**LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS**

SLOS068R – JUNE 1976 – REVISED JULY 2010

---

§ The actual top-side marking has one additional character that designates the wafer fab/assembly site.




POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS

SLOS068R – JUNE 1976 – REVISED JULY 2010

symbol (each amplifier)



schematic (each amplifier)

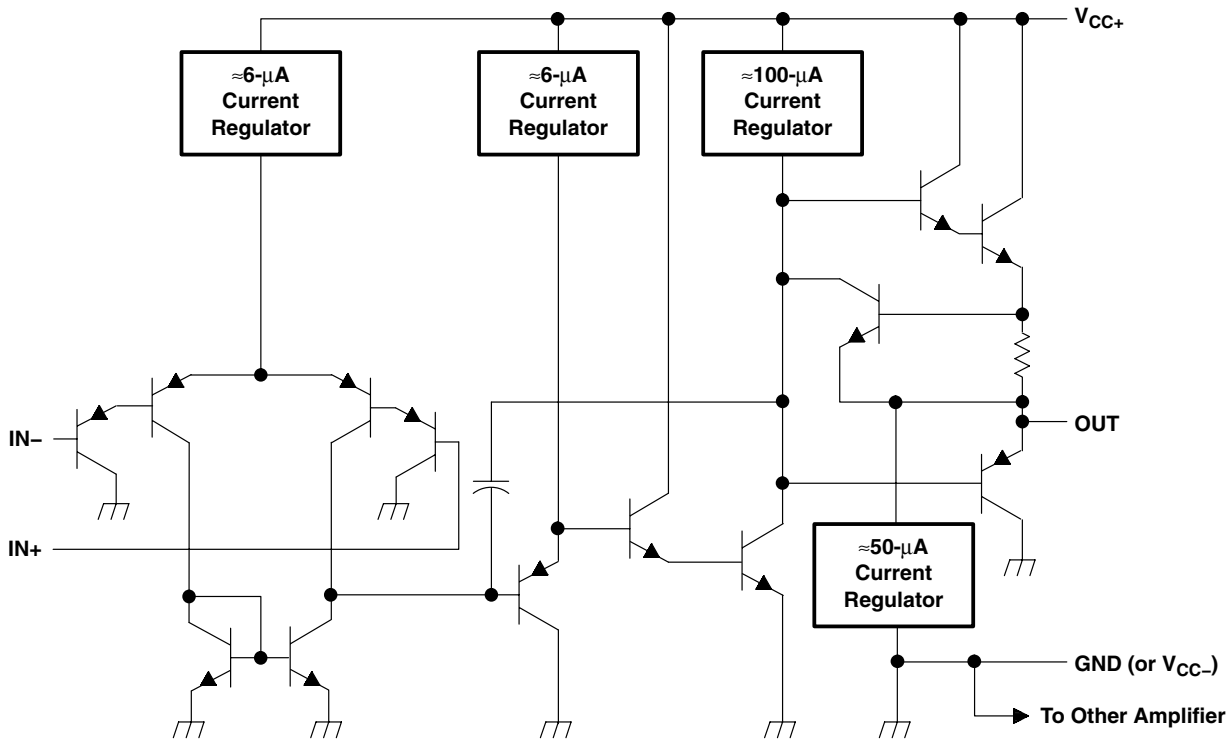

| COMPONENT COUNT |    |
|-----------------|----|
| Epi-FET         | 1  |
| Diodes          | 2  |
| Resistors       | 7  |
| Transistors     | 51 |
| Capacitors      | 2  |

**LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS**

SLOS068R – JUNE 1976 – REVISED JULY 2010

**absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>**

|                                                                                                                                       |               | LM158, LM158A<br>LM258, LM258A<br>LM358, LM358A<br>LM2904V | LM2904         | UNIT |
|---------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------------------------------------|----------------|------|
| Supply voltage, $V_{CC}$ (see Note 1)                                                                                                 |               | $\pm 16$ or 32                                             | $\pm 13$ or 26 | V    |
| Differential input voltage, $V_{ID}$ (see Note 2)                                                                                     |               | $\pm 32$                                                   | $\pm 26$       | V    |
| Input voltage, $V_I$ (either input)                                                                                                   |               | $-0.3$ to 32                                               | $-0.3$ to 26   | V    |
| Duration of output short circuit (one amplifier) to ground at (or below) 25°C free-air temperature ( $V_{CC} \leq 15$ V) (see Note 3) |               | Unlimited                                                  | Unlimited      |      |
| Package thermal impedance, $\theta_{JA}$ (see Notes 4 and 5)                                                                          | D package     | 97                                                         | 97             | °C/W |
|                                                                                                                                       | DGK package   | 172                                                        | 172            |      |
|                                                                                                                                       | P package     | 85                                                         | 85             |      |
|                                                                                                                                       | PS package    | 95                                                         | 95             |      |
|                                                                                                                                       | PW package    | 149                                                        | 149            |      |
| Package thermal impedance, $\theta_{JC}$ (see Notes 6 and 7)                                                                          | FK package    | 5.61                                                       |                | °C/W |
|                                                                                                                                       | JG package    | 14.5                                                       |                |      |
| Operating free-air temperature range, $T_A$                                                                                           | LM158, LM158A | $-55$ to 125                                               |                | °C   |
|                                                                                                                                       | LM258, LM258A | $-25$ to 85                                                |                |      |
|                                                                                                                                       | LM358, LM358A | 0 to 70                                                    |                |      |
|                                                                                                                                       | LM2904        | $-40$ to 125                                               | $-40$ to 125   |      |
| Operating virtual junction temperature, $T_J$                                                                                         |               | 150                                                        | 150            | °C   |
| Case temperature for 60 seconds                                                                                                       | FK package    | 260                                                        |                | °C   |
| Lead temperature 1,6 mm (1/16 inch) from case for 60 seconds                                                                          | JG package    | 300                                                        | 300            | °C   |
| Storage temperature range, $T_{stg}$                                                                                                  |               | $-65$ to 150                                               | $-65$ to 150   | °C   |

<sup>†</sup> Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential voltages and  $V_{CC}$  specified for measurement of  $I_{OS}$ , are with respect to the network ground terminal.

2. Differential voltages are at  $IN+$  with respect to  $IN-$ .

3. Short circuits from outputs to  $V_{CC}$  can cause excessive heating and eventual destruction.

4. Maximum power dissipation is a function of  $T_J(max)$ ,  $\theta_{JA}$ , and  $T_A$ . The maximum allowable power dissipation at any allowable ambient temperature is  $P_D = (T_J(max) - T_A)/\theta_{JA}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.

5. The package thermal impedance is calculated in accordance with JESD 51-7.

6. Maximum power dissipation is a function of  $T_J(max)$ ,  $\theta_{JC}$ , and  $T_C$ . The maximum allowable power dissipation at any allowable case temperature is  $P_D = (T_J(max) - T_C)/\theta_{JC}$ . Operating at the absolute maximum  $T_J$  of 150°C can affect reliability.

7. The package thermal impedance is calculated in accordance with MIL-STD-883.



# LM158, LM158A, LM258, LM258A LM358, LM358A, LM2904, LM2904V DUAL OPERATIONAL AMPLIFIERS

SLOS068R – JUNE 1976 – REVISED JULY 2010

electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)

| PARAMETER                        |                                                                      | TEST CONDITIONS†                                                                                     |                        | T <sub>A</sub> ‡ | LM158<br>LM258                |      |     | LM358                         |      |     | UNIT  |
|----------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------------|------------------|-------------------------------|------|-----|-------------------------------|------|-----|-------|
|                                  |                                                                      |                                                                                                      |                        |                  | MIN                           | TYP§ | MAX | MIN                           | TYP§ | MAX |       |
| V <sub>IO</sub>                  | Input offset voltage                                                 | V <sub>CC</sub> = 5 V to MAX,<br>V <sub>IC</sub> = V <sub>ICR(min)</sub> ,<br>V <sub>O</sub> = 1.4 V |                        | 25°C             | 3      5                      |      |     | 3      7                      |      |     | mV    |
|                                  |                                                                      |                                                                                                      |                        | Full range       | 7                             |      |     | 9                             |      |     |       |
| α <sub>V<sub>IO</sub></sub>      | Average temperature coefficient of input offset voltage              |                                                                                                      |                        | Full range       | 7                             |      |     | 7                             |      |     | μV/°C |
| I <sub>IO</sub>                  | Input offset current                                                 | V <sub>O</sub> = 1.4 V                                                                               |                        | 25°C             | 2      30                     |      |     | 2      50                     |      |     | nA    |
|                                  |                                                                      |                                                                                                      |                        | Full range       | 100                           |      |     | 150                           |      |     |       |
| α <sub>I<sub>IO</sub></sub>      | Average temperature coefficient of input offset current              |                                                                                                      |                        | Full range       | 10                            |      |     | 10                            |      |     | pA/°C |
| I <sub>IB</sub>                  | Input bias current                                                   | V <sub>O</sub> = 1.4 V                                                                               |                        | 25°C             | –20    –150                   |      |     | –20    –250                   |      |     | nA    |
|                                  |                                                                      |                                                                                                      |                        | Full range       | –300                          |      |     | –500                          |      |     |       |
| V <sub>ICR</sub>                 | Common-mode input voltage range                                      | V <sub>CC</sub> = 5 V to MAX                                                                         |                        | 25°C             | 0 to<br>V <sub>CC</sub> – 1.5 |      |     | 0 to<br>V <sub>CC</sub> – 1.5 |      |     | V     |
|                                  |                                                                      |                                                                                                      |                        | Full range       | 0 to<br>V <sub>CC</sub> – 2   |      |     | 0 to<br>V <sub>CC</sub> – 2   |      |     |       |
| V <sub>OH</sub>                  | High-level output voltage                                            | R <sub>L</sub> ≥ 2 kΩ                                                                                |                        | 25°C             | V <sub>CC</sub> – 1.5         |      |     | V <sub>CC</sub> – 1.5         |      |     | V     |
|                                  |                                                                      | R <sub>L</sub> ≥ 10 kΩ                                                                               |                        | 25°C             |                               |      |     |                               |      |     |       |
|                                  |                                                                      | V <sub>CC</sub> = MAX                                                                                | R <sub>L</sub> = 2 kΩ  | Full range       | 26                            |      |     | 26                            |      |     |       |
|                                  |                                                                      |                                                                                                      | R <sub>L</sub> ≥ 10 kΩ | Full range       | 27      28                    |      |     | 27      28                    |      |     |       |
| V <sub>OL</sub>                  | Low-level output voltage                                             | R <sub>L</sub> ≤ 10 kΩ                                                                               |                        | Full range       | 5      20                     |      |     | 5      20                     |      |     | mV    |
| A <sub>VD</sub>                  | Large-signal differential voltage amplification                      | V <sub>CC</sub> = 15 V,<br>V <sub>O</sub> = 1 V to 11 V,<br>R <sub>L</sub> ≥ 2 kΩ                    |                        | 25°C             | 50      100                   |      |     | 25      100                   |      |     | V/mV  |
|                                  |                                                                      |                                                                                                      |                        | Full range       | 25                            |      |     | 15                            |      |     |       |
| CMRR                             | Common-mode rejection ratio                                          | V <sub>CC</sub> = 5 V to MAX,<br>V <sub>IC</sub> = V <sub>ICR(min)</sub>                             |                        | 25°C             | 70      80                    |      |     | 65      80                    |      |     | dB    |
| k <sub>SVR</sub>                 | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>CC</sub> = 5 V to MAX                                                                         |                        | 25°C             | 65      100                   |      |     | 65      100                   |      |     | dB    |
| V <sub>O1</sub> /V <sub>O2</sub> | Crosstalk attenuation                                                | f = 1 kHz to 20 kHz                                                                                  |                        | 25°C             | 120                           |      |     | 120                           |      |     | dB    |
| I <sub>O</sub>                   | Output current                                                       | V <sub>CC</sub> = 15 V,<br>V <sub>ID</sub> = 1 V,<br>V <sub>O</sub> = 0                              | Source                 | 25°C             | –20    –30                    |      |     | –20    –30                    |      |     | mA    |
|                                  |                                                                      |                                                                                                      |                        | Full range       | –10                           |      |     | –10                           |      |     |       |
|                                  |                                                                      | V <sub>CC</sub> = 15 V,<br>V <sub>ID</sub> = –1 V,<br>V <sub>O</sub> = 15 V                          | Sink                   | 25°C             | 10      20                    |      |     | 10      20                    |      |     |       |
|                                  |                                                                      |                                                                                                      |                        | Full range       | 5                             |      |     | 5                             |      |     |       |
| I <sub>O</sub>                   | Output current                                                       | V <sub>ID</sub> = –1 V, V <sub>O</sub> = 200 mV                                                      |                        | 25°C             | 12      30                    |      |     | 12      30                    |      |     | μA    |
| I <sub>OS</sub>                  | Short-circuit output current                                         | V <sub>CC</sub> at 5 V, GND at –5 V,<br>V <sub>O</sub> = 0                                           |                        | 25°C             | ±40    ±60                    |      |     | ±40    ±60                    |      |     | mA    |
| I <sub>CC</sub>                  | Supply current (two amplifiers)                                      | V <sub>O</sub> = 2.5 V, No load                                                                      |                        | Full range       | 0.7      1.2                  |      |     | 0.7      1.2                  |      |     | mA    |
|                                  |                                                                      | V <sub>CC</sub> = MAX, V <sub>O</sub> = 0.5 V,<br>No load                                            |                        | Full range       | 1      2                      |      |     | 1      2                      |      |     |       |

† All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified. MAX  $V_{CC}$  for testing purposes is 26 V for the LM2904 and 30 V for others.

‡ Full range is –55°C to 125°C for LM158, –25°C to 85°C for LM258, 0°C to 70°C for LM358, and –40°C to 125°C for LM2904.

§ All typical values are at  $T_A = 25^\circ\text{C}$ .



**LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS**

SLOS068R – JUNE 1976 – REVISED JULY 2010

**electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS†                                                                          |                              | $T_A$ ‡    | LM2904              |          |      | UNIT                         |
|----------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------------------|------------|---------------------|----------|------|------------------------------|
|                                                                            |                                                                                           |                              |            | MIN                 | TYP§     | MAX  |                              |
| $V_{IO}$ Input offset voltage                                              | $V_{CC} = 5\text{ V to MAX,}$<br>$V_{IC} = V_{ICR(min)},$<br>$V_O = 1.4\text{ V}$         | Non-A devices                | 25°C       | 3                   |          | 7    | mV                           |
|                                                                            |                                                                                           |                              | Full range |                     |          | 10   |                              |
|                                                                            |                                                                                           | A-suffix devices             | 25°C       | 1                   |          | 2    |                              |
|                                                                            |                                                                                           |                              | Full range |                     |          | 4    |                              |
| $\alpha_{V_{IO}}$ Average temperature coefficient of input offset voltage  |                                                                                           |                              | Full range |                     | 7        |      | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                              | $V_O = 1.4\text{ V}$                                                                      | Non-V device                 | 25°C       | 2                   |          | 50   | nA                           |
|                                                                            |                                                                                           |                              | Full range |                     |          | 300  |                              |
|                                                                            |                                                                                           | V-suffix device              | 25°C       | 2                   |          | 50   |                              |
|                                                                            |                                                                                           |                              | Full range |                     |          | 150  |                              |
| $\alpha_{I_{IO}}$ Average temperature coefficient of input offset current  |                                                                                           |                              | Full range |                     | 10       |      | $\text{pA}/^\circ\text{C}$   |
| $I_{IB}$ Input bias current                                                | $V_O = 1.4\text{ V}$                                                                      |                              | 25°C       | –20                 |          | –250 | nA                           |
|                                                                            |                                                                                           |                              | Full range |                     |          | –500 |                              |
| $V_{ICR}$ Common-mode input voltage range                                  | $V_{CC} = 5\text{ V to MAX}$                                                              |                              | 25°C       | 0 to $V_{CC} - 1.5$ |          |      | V                            |
|                                                                            |                                                                                           |                              | Full range | 0 to $V_{CC} - 2$   |          |      |                              |
| $V_{OH}$ High-level output voltage                                         | $R_L \geq 10\text{ k}\Omega$                                                              |                              | 25°C       | $V_{CC} - 1.5$      |          |      | V                            |
|                                                                            | $V_{CC} = \text{MAX,}$<br>Non-V device                                                    | $R_L = 2\text{ k}\Omega$     | Full range | 22                  |          |      |                              |
|                                                                            |                                                                                           | $R_L \geq 10\text{ k}\Omega$ | Full range | 23                  | 24       |      |                              |
|                                                                            | $V_{CC} = \text{MAX,}$<br>V-suffix device                                                 | $R_L = 2\text{ k}\Omega$     | Full range | 26                  |          |      |                              |
|                                                                            |                                                                                           | $R_L \geq 10\text{ k}\Omega$ | Full range | 27                  | 28       |      |                              |
|                                                                            |                                                                                           |                              |            |                     |          |      |                              |
| $V_{OL}$ Low-level output voltage                                          | $R_L \leq 10\text{ k}\Omega$                                                              |                              | Full range |                     | 5        | 20   | mV                           |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{CC} = 15\text{ V, } V_O = 1\text{ V to } 11\text{ V,}$<br>$R_L \geq 2\text{ k}\Omega$ |                              | 25°C       | 25                  | 100      |      | V/mV                         |
|                                                                            |                                                                                           |                              | Full range | 15                  |          |      |                              |
| CMRR Common-mode rejection ratio                                           | $V_{CC} = 5\text{ V to MAX,}$<br>$V_{IC} = V_{ICR(min)}$                                  | Non-V device                 | 25°C       | 50                  | 80       |      | dB                           |
|                                                                            |                                                                                           | V-suffix device              | 25°C       | 65                  | 80       |      |                              |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{CC} = 5\text{ V to MAX}$                                                              |                              | 25°C       | 65                  | 100      |      | dB                           |
| $V_{O1}/V_{O2}$ Crosstalk attenuation                                      | $f = 1\text{ kHz to } 20\text{ kHz}$                                                      |                              | 25°C       |                     | 120      |      | dB                           |
| $I_O$ Output current                                                       | $V_{CC} = 15\text{ V,}$<br>$V_{ID} = 1\text{ V, } V_O = 0$                                | Source                       | 25°C       | –20                 | –30      |      | mA                           |
|                                                                            |                                                                                           |                              | Full range | –10                 |          |      |                              |
|                                                                            | $V_{CC} = 15\text{ V,}$<br>$V_{ID} = -1\text{ V,}$<br>$V_O = 15\text{ V}$                 | Sink                         | 25°C       | 10                  | 20       |      | mA                           |
|                                                                            |                                                                                           |                              | Full range | 5                   |          |      |                              |
|                                                                            | $V_{ID} = -1\text{ V,}$<br>$V_O = 200\text{ mV}$                                          | Non-V device                 | 25°C       |                     | 30       |      | $\mu\text{A}$                |
|                                                                            |                                                                                           | V-suffix device              | 25°C       | 12                  | 40       |      |                              |
| $I_{OS}$ Short-circuit output current                                      | $V_{CC}$ at 5 V, GND at –5 V, $V_O = 0$                                                   |                              | 25°C       | $\pm 40$            | $\pm 60$ |      | mA                           |
| $I_{CC}$ Supply current (two amplifiers)                                   | $V_O = 2.5\text{ V, No load}$                                                             |                              | Full range | 0.7                 | 1.2      |      | mA                           |
|                                                                            | $V_{CC} = \text{MAX, } V_O = 0.5\text{ V, No load}$                                       |                              | Full range | 1                   | 2        |      |                              |

† All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified. MAX  $V_{CC}$  for testing purposes is 26 V for the LM2904, 32 V for the LM2904V, and 30 V for others.

‡ Full range is –55°C to 125°C for LM158, –25°C to 85°C for LM258, 0°C to 70°C for LM358, and –40°C to 125°C for LM2904.

§ All typical values are at  $T_A = 25^\circ\text{C}$ .



**LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS**

SLOS068R – JUNE 1976 – REVISED JULY 2010

**electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                        |                                                                      | TEST CONDITIONS†                                                                                      |                        | T <sub>A</sub> ‡ | LM158A                     |      |     | LM258A                     |      |     | UNIT  |
|----------------------------------|----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|------------------------|------------------|----------------------------|------|-----|----------------------------|------|-----|-------|
|                                  |                                                                      |                                                                                                       |                        |                  | MIN                        | TYP§ | MAX | MIN                        | TYP§ | MAX |       |
| V <sub>IO</sub>                  | Input offset voltage                                                 | V <sub>CC</sub> = 5 V to 30 V,<br>V <sub>IC</sub> = V <sub>ICR(min)</sub> ,<br>V <sub>O</sub> = 1.4 V |                        | 25°C             | 2                          |      |     | 2                          |      |     | mV    |
|                                  |                                                                      |                                                                                                       |                        | Full range       | 4                          |      |     | 4                          |      |     |       |
| α <sub>V<sub>IO</sub></sub>      | Average temperature coefficient of input offset voltage              |                                                                                                       |                        | Full range       | 7                          |      |     | 7                          |      |     | μV/°C |
| I <sub>IO</sub>                  | Input offset current                                                 | V <sub>O</sub> = 1.4 V                                                                                |                        | 25°C             | 2                          |      |     | 2                          |      |     | nA    |
|                                  |                                                                      |                                                                                                       |                        | Full range       | 30                         |      |     | 30                         |      |     |       |
| α <sub>I<sub>IO</sub></sub>      | Average temperature coefficient of input offset current              |                                                                                                       |                        | Full range       | 10                         |      |     | 10                         |      |     | pA/°C |
| I <sub>IB</sub>                  | Input bias current                                                   | V <sub>O</sub> = 1.4 V                                                                                |                        | 25°C             | –15                        |      |     | –15                        |      |     | nA    |
|                                  |                                                                      |                                                                                                       |                        | Full range       | –100                       |      |     | –100                       |      |     |       |
| V <sub>ICR</sub>                 | Common-mode input voltage range                                      | V <sub>CC</sub> = 30 V                                                                                |                        | 25°C             | 0 to V <sub>CC</sub> – 1.5 |      |     | 0 to V <sub>CC</sub> – 1.5 |      |     | V     |
|                                  |                                                                      |                                                                                                       |                        | Full range       | 0 to V <sub>CC</sub> – 2   |      |     | 0 to V <sub>CC</sub> – 2   |      |     |       |
| V <sub>OH</sub>                  | High-level output voltage                                            | R <sub>L</sub> ≥ 2 kΩ                                                                                 |                        | 25°C             | V <sub>CC</sub> – 1.5      |      |     | V <sub>CC</sub> – 1.5      |      |     | V     |
|                                  |                                                                      | V <sub>CC</sub> = 30 V                                                                                | R <sub>L</sub> = 2 kΩ  | Full range       | 26                         |      |     | 26                         |      |     |       |
|                                  |                                                                      |                                                                                                       | R <sub>L</sub> ≥ 10 kΩ | Full range       | 27                         | 28   |     | 27                         |      | 28  |       |
| V <sub>OL</sub>                  | Low-level output voltage                                             | R <sub>L</sub> ≤ 10 kΩ                                                                                |                        | Full range       | 5                          |      |     | 5                          |      |     | mV    |
| A <sub>VD</sub>                  | Large-signal differential voltage amplification                      | V <sub>CC</sub> = 15 V,<br>V <sub>O</sub> = 1 V to 11 V,<br>R <sub>L</sub> ≥ 2 kΩ                     |                        | 25°C             | 50                         | 100  |     | 50                         | 100  |     | V/mV  |
|                                  |                                                                      |                                                                                                       |                        | Full range       | 25                         |      | 25  |                            |      |     |       |
| CMRR                             | Common-mode rejection ratio                                          |                                                                                                       |                        | 25°C             | 70                         | 80   |     | 70                         | 80   |     | dB    |
| k <sub>SVR</sub>                 | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) |                                                                                                       |                        | 25°C             | 65                         | 100  |     | 65                         | 100  |     | dB    |
| V <sub>O1</sub> /V <sub>O2</sub> | Crosstalk attenuation                                                | f = 1 kHz to 20 kHz                                                                                   |                        | 25°C             | 120                        |      |     | 120                        |      |     | dB    |
| I <sub>O</sub>                   | Output current                                                       | V <sub>CC</sub> = 15 V,<br>V <sub>ID</sub> = 1 V,<br>V <sub>O</sub> = 0                               | Source                 | 25°C             | –20                        | –30  | –60 | –20                        | –30  | –60 | mA    |
|                                  |                                                                      |                                                                                                       |                        | Full range       | –10                        |      | –10 |                            |      |     |       |
|                                  |                                                                      | V <sub>CC</sub> = 15 V,<br>V <sub>ID</sub> = –1 V,<br>V <sub>O</sub> = 15                             | Sink                   | 25°C             | 10                         | 20   |     | 10                         | 20   |     |       |
|                                  |                                                                      |                                                                                                       |                        | Full range       | 5                          |      | 5   |                            |      |     |       |
|                                  |                                                                      | V <sub>ID</sub> = –1 V, V <sub>O</sub> = 200 mV                                                       |                        | 25°C             | 12                         | 30   |     | 12                         | 30   |     | μA    |
| I <sub>OS</sub>                  | Short-circuit output current                                         | V <sub>CC</sub> at 5 V, GND at –5 V,<br>V <sub>O</sub> = 0                                            |                        | 25°C             | ±40                        |      |     | ±40                        |      |     | mA    |
| I <sub>CC</sub>                  | Supply current (two amplifiers)                                      | V <sub>O</sub> = 2.5 V, No load                                                                       |                        | Full range       | 0.7                        |      |     | 0.7                        |      |     | mA    |
|                                  |                                                                      | V <sub>CC</sub> = MAX, V <sub>O</sub> = 0.5 V,<br>No load                                             |                        | Full range       | 1                          |      |     | 1                          |      |     |       |

\*On products compliant to MIL-PRF-38535, this parameter is not production tested.

† All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified. MAX  $V_{CC}$  for testing purposes is 26 V for LM2904 and 30 V for others.

‡ Full range is –55°C to 125°C for LM158A, –25°C to 85°C for LM258A, and 0°C to 70°C for LM358A.

§ All typical values are at  $T_A = 25^\circ\text{C}$ .





**LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS**

SLOS068R – JUNE 1976 – REVISED JULY 2010

**electrical characteristics at specified free-air temperature,  $V_{CC} = 5\text{ V}$  (unless otherwise noted)**

| PARAMETER                                                                  | TEST CONDITIONS†                                                                            | $T_A$ ‡    | LM358A              |          |          | UNIT                         |
|----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|------------|---------------------|----------|----------|------------------------------|
|                                                                            |                                                                                             |            | MIN                 | TYP§     | MAX      |                              |
| $V_{IO}$ Input offset voltage                                              | $V_{CC} = 5\text{ V to }30\text{ V}$ ,<br>$V_{IC} = V_{ICR(min)}$ , $V_O = 1.4\text{ V}$    | 25°C       | 2                   | 3        |          | mV                           |
|                                                                            |                                                                                             | Full range |                     |          | 5        |                              |
| $\alpha_{V_{IO}}$ Average temperature coefficient of input offset voltage  |                                                                                             | Full range | 7                   | 20       |          | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                              | $V_O = 1.4\text{ V}$                                                                        | 25°C       | 2                   | 30       |          | nA                           |
|                                                                            |                                                                                             | Full range |                     |          | 75       |                              |
| $\alpha_{I_{IO}}$ Average temperature coefficient of input offset current  |                                                                                             | Full range | 10                  | 300      |          | $\text{pA}/^\circ\text{C}$   |
| $I_{IB}$ Input bias current                                                | $V_O = 1.4\text{ V}$                                                                        | 25°C       | –15                 | –100     |          | nA                           |
|                                                                            |                                                                                             | Full range |                     |          | –200     |                              |
| $V_{ICR}$ Common-mode input voltage range                                  | $V_{CC} = 30\text{ V}$                                                                      | 25°C       | 0 to $V_{CC} - 1.5$ |          |          | V                            |
|                                                                            |                                                                                             | Full range | 0 to $V_{CC} - 2$   |          |          |                              |
| $V_{OH}$ High-level output voltage                                         | $R_L \geq 2\text{ k}\Omega$                                                                 | 25°C       | $V_{CC} - 1.5$      |          |          | V                            |
|                                                                            | $V_{CC} = 30\text{ V}$                                                                      | Full range | 26                  |          |          |                              |
|                                                                            |                                                                                             | Full range | 27                  | 28       |          |                              |
| $V_{OL}$ Low-level output voltage                                          | $R_L \leq 10\text{ k}\Omega$                                                                | Full range | 5                   | 20       |          | mV                           |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{CC} = 15\text{ V}$ , $V_O = 1\text{ V to }11\text{ V}$ ,<br>$R_L \geq 2\text{ k}\Omega$ | 25°C       | 25                  | 100      |          | V/mV                         |
|                                                                            |                                                                                             | Full range | 15                  |          |          |                              |
| CMRR Common-mode rejection ratio                                           |                                                                                             | 25°C       | 65                  | 80       |          | dB                           |
| $k_{SVR}$ Supply-voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) |                                                                                             | 25°C       | 65                  | 100      |          | dB                           |
| $V_{O1}/V_{O2}$ Crosstalk attenuation                                      | $f = 1\text{ kHz to }20\text{ kHz}$                                                         | 25°C       | 120                 |          |          | dB                           |
| $I_O$ Output current                                                       | $V_{CC} = 15\text{ V}$ ,<br>$V_{ID} = 1\text{ V}$ ,<br>$V_O = 0$                            | Source     | 25°C                | –20      | –30 –60  | mA                           |
|                                                                            |                                                                                             | Full range |                     | –10      |          |                              |
|                                                                            | $V_{CC} = 15\text{ V}$ ,<br>$V_{ID} = -1\text{ V}$ ,<br>$V_O = 15\text{ V}$                 | Sink       | 25°C                | 10       | 20       |                              |
|                                                                            |                                                                                             | Full range |                     | 5        |          |                              |
|                                                                            | $V_{ID} = -1\text{ V}$ , $V_O = 200\text{ mV}$                                              | 25°C       |                     | 30       |          | $\mu\text{A}$                |
| $I_{OS}$ Short-circuit output current                                      | $V_{CC}$ at 5 V, GND at –5 V, $V_O = 0$                                                     | 25°C       |                     | $\pm 40$ | $\pm 60$ | mA                           |
| $I_{CC}$ Supply current (two amplifiers)                                   | $V_O = 2.5\text{ V}$ , No load                                                              | Full range |                     | 0.7      | 1.2      | mA                           |
|                                                                            | $V_{CC} = \text{MAX}$ , $V_O = 0.5\text{ V}$ , No load                                      | Full range |                     | 1        | 2        |                              |

† All characteristics are measured under open-loop conditions, with zero common-mode input voltage, unless otherwise specified. MAX  $V_{CC}$  for testing purposes is 26 V for LM2904 and 30 V for others.

‡ Full range is –55°C to 125°C for LM158A, –25°C to 85°C for LM258A, and 0°C to 70°C for LM358A.

§ All typical values are at  $T_A = 25^\circ\text{C}$ .

LM158, LM158A, LM258, LM258A  
LM358, LM358A, LM2904, LM2904V  
DUAL OPERATIONAL AMPLIFIERS

SLOS068R – JUNE 1976 – REVISED JULY 2010

operating conditions,  $V_{CC} = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$

| PARAMETER |                                | TEST CONDITIONS                                                                             | TYP | UNIT                         |
|-----------|--------------------------------|---------------------------------------------------------------------------------------------|-----|------------------------------|
| SR        | Slew rate at unity gain        | $R_L = 1\text{ M}\Omega$ , $C_L = 30\text{ pF}$ , $V_I = \pm 10\text{ V}$<br>(see Figure 1) | 0.3 | $\text{V}/\mu\text{s}$       |
| $B_1$     | Unity-gain bandwidth           | $R_L = 1\text{ M}\Omega$ , $C_L = 20\text{ pF}$ (see Figure 1)                              | 0.7 | MHz                          |
| $V_n$     | Equivalent input noise voltage | $R_S = 100\text{ }\Omega$ , $V_I = 0\text{ V}$ , $f = 1\text{ kHz}$<br>(see Figure 2)       | 40  | $\text{nV}/\sqrt{\text{Hz}}$ |

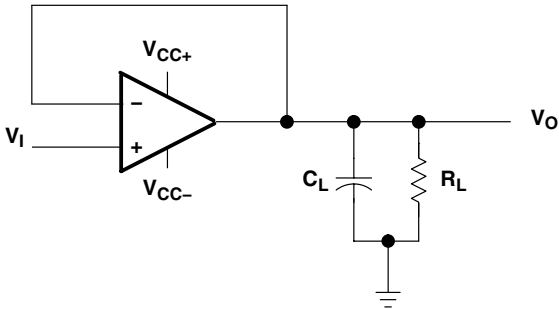


Figure 1. Unity-Gain Amplifier

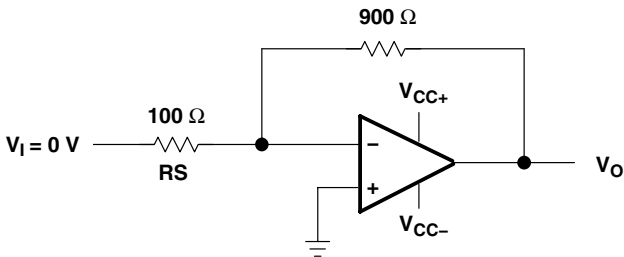


Figure 2. Noise-Test Circuit

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4)        | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|---------------------------------|-------------------------|
| 5962-87710012A   | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | Call TI          | Call TI              | -55 to 125   | 5962-<br>87710012A<br>LM158FKB  | <a href="#">Samples</a> |
| 5962-8771001PA   | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | Call TI          | Call TI              | -55 to 125   | 8771001PA<br>LM158              | <a href="#">Samples</a> |
| 5962-87710022A   | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | Call TI          | Call TI              | -55 to 125   | 5962-<br>87710022A<br>LM158AFKB | <a href="#">Samples</a> |
| 5962-8771002PA   | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | Call TI          | Call TI              | -55 to 125   | 8771002PA<br>LM158A             | <a href="#">Samples</a> |
| LM158AFKB        | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE       | N / A for Pkg Type   | -55 to 125   | 5962-<br>87710022A<br>LM158AFKB | <a href="#">Samples</a> |
| LM158AJG         | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | LM158AJG                        | <a href="#">Samples</a> |
| LM158AJGB        | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | 8771002PA<br>LM158A             | <a href="#">Samples</a> |
| LM158FKB         | ACTIVE        | LCCC         | FK                 | 20   | 1              | TBD                        | POST-PLATE       | N / A for Pkg Type   | -55 to 125   | 5962-<br>87710012A<br>LM158FKB  | <a href="#">Samples</a> |
| LM158JG          | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | LM158JG                         | <a href="#">Samples</a> |
| LM158JGB         | ACTIVE        | CDIP         | JG                 | 8    | 1              | TBD                        | A42              | N / A for Pkg Type   | -55 to 125   | 8771001PA<br>LM158              | <a href="#">Samples</a> |
| LM258AD          | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258A                          | <a href="#">Samples</a> |
| LM258ADE4        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258A                          | <a href="#">Samples</a> |
| LM258ADG4        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258A                          | <a href="#">Samples</a> |
| LM258ADGKR       | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | (M3L ~ M3P ~ M3S ~<br>M3U)      | <a href="#">Samples</a> |
| LM258ADGKRG4     | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | (M3L ~ M3P ~ M3S ~<br>M3U)      | <a href="#">Samples</a> |
| LM258ADR         | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258A                          | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4)   | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|----------------------------|-------------------------|
| LM258ADRE4       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258A                     | <a href="#">Samples</a> |
| LM258ADRG4       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258A                     | <a href="#">Samples</a> |
| LM258AP          | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -25 to 85    | LM258AP                    | <a href="#">Samples</a> |
| LM258APE4        | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -25 to 85    | LM258AP                    | <a href="#">Samples</a> |
| LM258D           | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258                      | <a href="#">Samples</a> |
| LM258DE4         | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258                      | <a href="#">Samples</a> |
| LM258DG4         | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258                      | <a href="#">Samples</a> |
| LM258DGKR        | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | (M2L ~ M2P ~ M2S ~<br>M2U) | <a href="#">Samples</a> |
| LM258DGKRG4      | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | (M2L ~ M2P ~ M2S ~<br>M2U) | <a href="#">Samples</a> |
| LM258DR          | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258                      | <a href="#">Samples</a> |
| LM258DRE4        | ACTIVE        | SOIC         | D                  | 8    |                | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258                      | <a href="#">Samples</a> |
| LM258DRG3        | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | -25 to 85    | LM258                      | <a href="#">Samples</a> |
| LM258DRG4        | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -25 to 85    | LM258                      | <a href="#">Samples</a> |
| LM258P           | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -25 to 85    | LM258P                     | <a href="#">Samples</a> |
| LM258PE4         | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -25 to 85    | LM258P                     | <a href="#">Samples</a> |
| LM2904AVQDR      | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904AV                    | <a href="#">Samples</a> |
| LM2904AVQDRG4    | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904AV                    | <a href="#">Samples</a> |
| LM2904AVQPWR     | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904AV                    | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4)   | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|----------------------------|-------------------------|
| LM2904AVQPWRG4   | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904AV                    | <a href="#">Samples</a> |
| LM2904D          | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | LM2904                     | <a href="#">Samples</a> |
| LM2904DE4        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | LM2904                     | <a href="#">Samples</a> |
| LM2904DG4        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | LM2904                     | <a href="#">Samples</a> |
| LM2904DGKR       | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | (MBL ~ MBP ~ MBS ~<br>MBU) | <a href="#">Samples</a> |
| LM2904DGKRG4     | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | (MBL ~ MBP ~ MBS ~<br>MBU) | <a href="#">Samples</a> |
| LM2904DR         | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | LM2904                     | <a href="#">Samples</a> |
| LM2904DRE4       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | LM2904                     | <a href="#">Samples</a> |
| LM2904DRG3       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | -40 to 125   | LM2904                     | <a href="#">Samples</a> |
| LM2904DRG4       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | LM2904                     | <a href="#">Samples</a> |
| LM2904P          | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 125   | LM2904P                    | <a href="#">Samples</a> |
| LM2904PE4        | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | -40 to 125   | LM2904P                    | <a href="#">Samples</a> |
| LM2904PSR        | ACTIVE        | SO           | PS                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904                      | <a href="#">Samples</a> |
| LM2904PSRE4      | ACTIVE        | SO           | PS                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904                      | <a href="#">Samples</a> |
| LM2904PSRG4      | ACTIVE        | SO           | PS                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904                      | <a href="#">Samples</a> |
| LM2904PW         | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904                      | <a href="#">Samples</a> |
| LM2904PWE4       | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904                      | <a href="#">Samples</a> |
| LM2904PWG4       | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904                      | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| LM2904PWLE       | OBSOLETE      | TSSOP        | PW                 | 8    |                | TBD                        | Call TI          | Call TI              | -40 to 125   |                          |                         |
| LM2904PWR        | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904                    | <a href="#">Samples</a> |
| LM2904PWRG3      | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | -40 to 125   | L2904                    | <a href="#">Samples</a> |
| LM2904QD         | OBSOLETE      | SOIC         | D                  | 8    |                | TBD                        | Call TI          | Call TI              | -40 to 125   |                          |                         |
| LM2904QDR        | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | 2904Q1                   | <a href="#">Samples</a> |
| LM2904QDRG4      | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | 2904Q1                   | <a href="#">Samples</a> |
| LM2904QP         | OBSOLETE      | PDIP         | P                  | 8    |                | TBD                        | Call TI          | Call TI              | -40 to 125   |                          |                         |
| LM2904VQDR       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904V                   | <a href="#">Samples</a> |
| LM2904VQDRG4     | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904V                   | <a href="#">Samples</a> |
| LM2904VQPWR      | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904V                   | <a href="#">Samples</a> |
| LM2904VQPWRG4    | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | -40 to 125   | L2904V                   | <a href="#">Samples</a> |
| LM358AD          | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358A                   | <a href="#">Samples</a> |
| LM358ADE4        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358A                   | <a href="#">Samples</a> |
| LM358ADG4        | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358A                   | <a href="#">Samples</a> |
| LM358ADGKR       | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | (M6L ~ M6P ~ M6S ~ M6U)  | <a href="#">Samples</a> |
| LM358ADGKRG4     | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | (M6L ~ M6P ~ M6S ~ M6U)  | <a href="#">Samples</a> |
| LM358ADR         | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358A                   | <a href="#">Samples</a> |
| LM358ADRE4       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358A                   | <a href="#">Samples</a> |
| LM358ADRG4       | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358A                   | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4)   | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|----------------------------|-------------------------|
| LM358AP          | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | LM358AP                    | <a href="#">Samples</a> |
| LM358APE4        | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | LM358AP                    | <a href="#">Samples</a> |
| LM358APW         | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358A                      | <a href="#">Samples</a> |
| LM358APWE4       | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358A                      | <a href="#">Samples</a> |
| LM358APWG4       | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358A                      | <a href="#">Samples</a> |
| LM358APWR        | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358A                      | <a href="#">Samples</a> |
| LM358APWRE4      | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358A                      | <a href="#">Samples</a> |
| LM358APWRG4      | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358A                      | <a href="#">Samples</a> |
| LM358D           | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358                      | <a href="#">Samples</a> |
| LM358DE4         | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358                      | <a href="#">Samples</a> |
| LM358DG4         | ACTIVE        | SOIC         | D                  | 8    | 75             | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358                      | <a href="#">Samples</a> |
| LM358DGKR        | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | (M5L ~ M5P ~ M5S ~<br>M5U) | <a href="#">Samples</a> |
| LM358DGKRG4      | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | (M5L ~ M5P ~ M5S ~<br>M5U) | <a href="#">Samples</a> |
| LM358DR          | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358                      | <a href="#">Samples</a> |
| LM358DRE4        | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358                      | <a href="#">Samples</a> |
| LM358DRG3        | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | 0 to 70      | LM358                      | <a href="#">Samples</a> |
| LM358DRG4        | ACTIVE        | SOIC         | D                  | 8    | 2500           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | LM358                      | <a href="#">Samples</a> |
| LM358P           | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | LM358P                     | <a href="#">Samples</a> |

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2)            | Lead/Ball Finish | MSL Peak Temp<br>(3) | Op Temp (°C) | Top-Side Markings<br>(4) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|----------------------------|------------------|----------------------|--------------|--------------------------|-------------------------|
| LM358PE3         | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU SN            | N / A for Pkg Type   | 0 to 70      | LM358P                   | <a href="#">Samples</a> |
| LM358PE4         | ACTIVE        | PDIP         | P                  | 8    | 50             | Pb-Free<br>(RoHS)          | CU NIPDAU        | N / A for Pkg Type   | 0 to 70      | LM358P                   | <a href="#">Samples</a> |
| LM358PSLE        | OBSOLETE      | SO           | PS                 | 8    |                | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| LM358PSR         | ACTIVE        | SO           | PS                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PSRE4       | ACTIVE        | SO           | PS                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PSRG4       | ACTIVE        | SO           | PS                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PW          | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PWE4        | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PWG4        | ACTIVE        | TSSOP        | PW                 | 8    | 150            | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PWLE        | OBSOLETE      | TSSOP        | PW                 | 8    |                | TBD                        | Call TI          | Call TI              | 0 to 70      |                          |                         |
| LM358PWR         | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PWRE4       | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PWRG3       | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU SN            | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |
| LM358PWRG4       | ACTIVE        | TSSOP        | PW                 | 8    | 2000           | Green (RoHS<br>& no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM   | 0 to 70      | L358                     | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.



**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> Multiple Top-Side Markings will be inside parentheses. Only one Top-Side Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Top-Side Marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.



In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

#### **OTHER QUALIFIED VERSIONS OF LM258A, LM2904 :**

- Automotive: [LM2904-Q1](#)
- Enhanced Product: [LM258A-EP](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects
- Enhanced Product - Supports Defense, Aerospace and Medical Applications

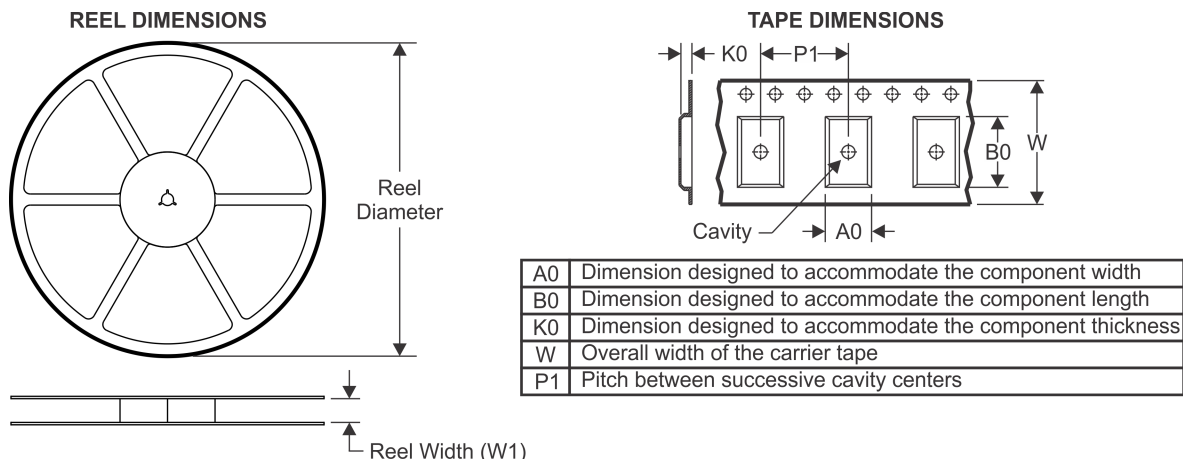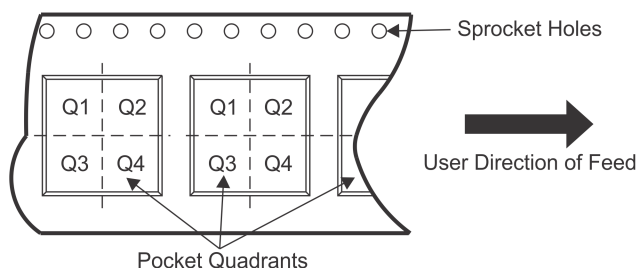
**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device     | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM258ADGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM258ADGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM258ADR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM258ADR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM258ADRG4 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM258DGKR  | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM258DGKR  | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM258DR    | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM258DRG4  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM258DRG4  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM2904DGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM2904DGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM2904DR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM2904DR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM2904DRG4 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM2904DRG4 | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM2904PSR  | SO           | PS              | 8    | 2000 | 330.0              | 16.4               | 8.2     | 6.6     | 2.5     | 12.0    | 16.0   | Q1            |
| LM2904PWR  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |

| Device      | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| LM2904PWRG3 | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM2904QDR   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM358ADGKR  | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM358ADGKR  | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM358ADR    | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM358ADRG4  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM358ADRG4  | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM358APWR   | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM358DGKR   | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM358DGKR   | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| LM358DR     | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 4.0     | 12.0   | Q1            |
| LM358DR     | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM358DR     | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM358DRG4   | SOIC         | D               | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| LM358PSR    | SO           | PS              | 8    | 2000 | 330.0              | 16.4               | 8.2     | 6.6     | 2.5     | 12.0    | 16.0   | Q1            |
| LM358PWR    | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
| LM358PWRG3  | TSSOP        | PW              | 8    | 2000 | 330.0              | 12.4               | 7.0     | 3.6     | 1.6     | 8.0     | 12.0   | Q1            |
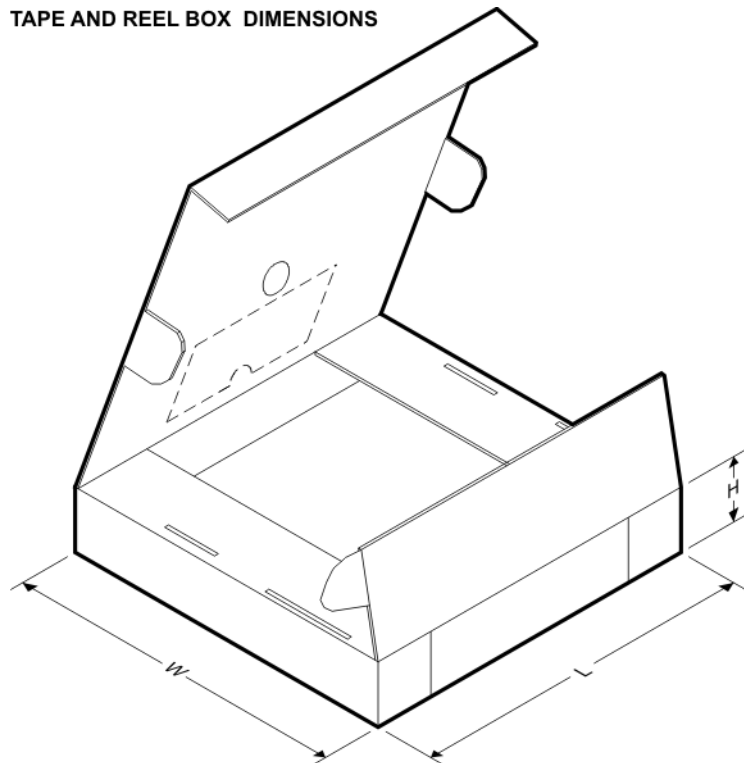
## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device      | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-------------|--------------|-----------------|------|------|-------------|------------|-------------|
| LM258ADGKR  | VSSOP        | DGK             | 8    | 2500 | 364.0       | 364.0      | 27.0        |
| LM258ADGKR  | VSSOP        | DGK             | 8    | 2500 | 332.0       | 358.0      | 35.0        |
| LM258ADR    | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM258ADR    | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM258ADRG4  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM258DGKR   | VSSOP        | DGK             | 8    | 2500 | 332.0       | 358.0      | 35.0        |
| LM258DGKR   | VSSOP        | DGK             | 8    | 2500 | 364.0       | 364.0      | 27.0        |
| LM258DR     | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM258DRG4   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM258DRG4   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM2904DGKR  | VSSOP        | DGK             | 8    | 2500 | 364.0       | 364.0      | 27.0        |
| LM2904DGKR  | VSSOP        | DGK             | 8    | 2500 | 332.0       | 358.0      | 35.0        |
| LM2904DR    | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM2904DR    | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM2904DRG4  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM2904DRG4  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM2904PSR   | SO           | PS              | 8    | 2000 | 367.0       | 367.0      | 38.0        |
| LM2904PWR   | TSSOP        | PW              | 8    | 2000 | 364.0       | 364.0      | 27.0        |
| LM2904PWRG3 | TSSOP        | PW              | 8    | 2000 | 364.0       | 364.0      | 27.0        |
| LM2904QDR   | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM358ADGKR  | VSSOP        | DGK             | 8    | 2500 | 364.0       | 364.0      | 27.0        |
| LM358ADGKR  | VSSOP        | DGK             | 8    | 2500 | 332.0       | 358.0      | 35.0        |
| LM358ADR    | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM358ADRG4  | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM358ADRG4  | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM358APWR   | TSSOP        | PW              | 8    | 2000 | 364.0       | 364.0      | 27.0        |
| LM358DGKR   | VSSOP        | DGK             | 8    | 2500 | 364.0       | 364.0      | 27.0        |
| LM358DGKR   | VSSOP        | DGK             | 8    | 2500 | 332.0       | 358.0      | 35.0        |
| LM358DR     | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM358DR     | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM358DR     | SOIC         | D               | 8    | 2500 | 367.0       | 367.0      | 35.0        |
| LM358DRG4   | SOIC         | D               | 8    | 2500 | 340.5       | 338.1      | 20.6        |
| LM358PSR    | SO           | PS              | 8    | 2000 | 367.0       | 367.0      | 38.0        |
| LM358PWR    | TSSOP        | PW              | 8    | 2000 | 364.0       | 364.0      | 27.0        |
| LM358PWRG3  | TSSOP        | PW              | 8    | 2000 | 364.0       | 364.0      | 27.0        |

## JG (R-GDIP-T8)

## CERAMIC DUAL-IN-LINE

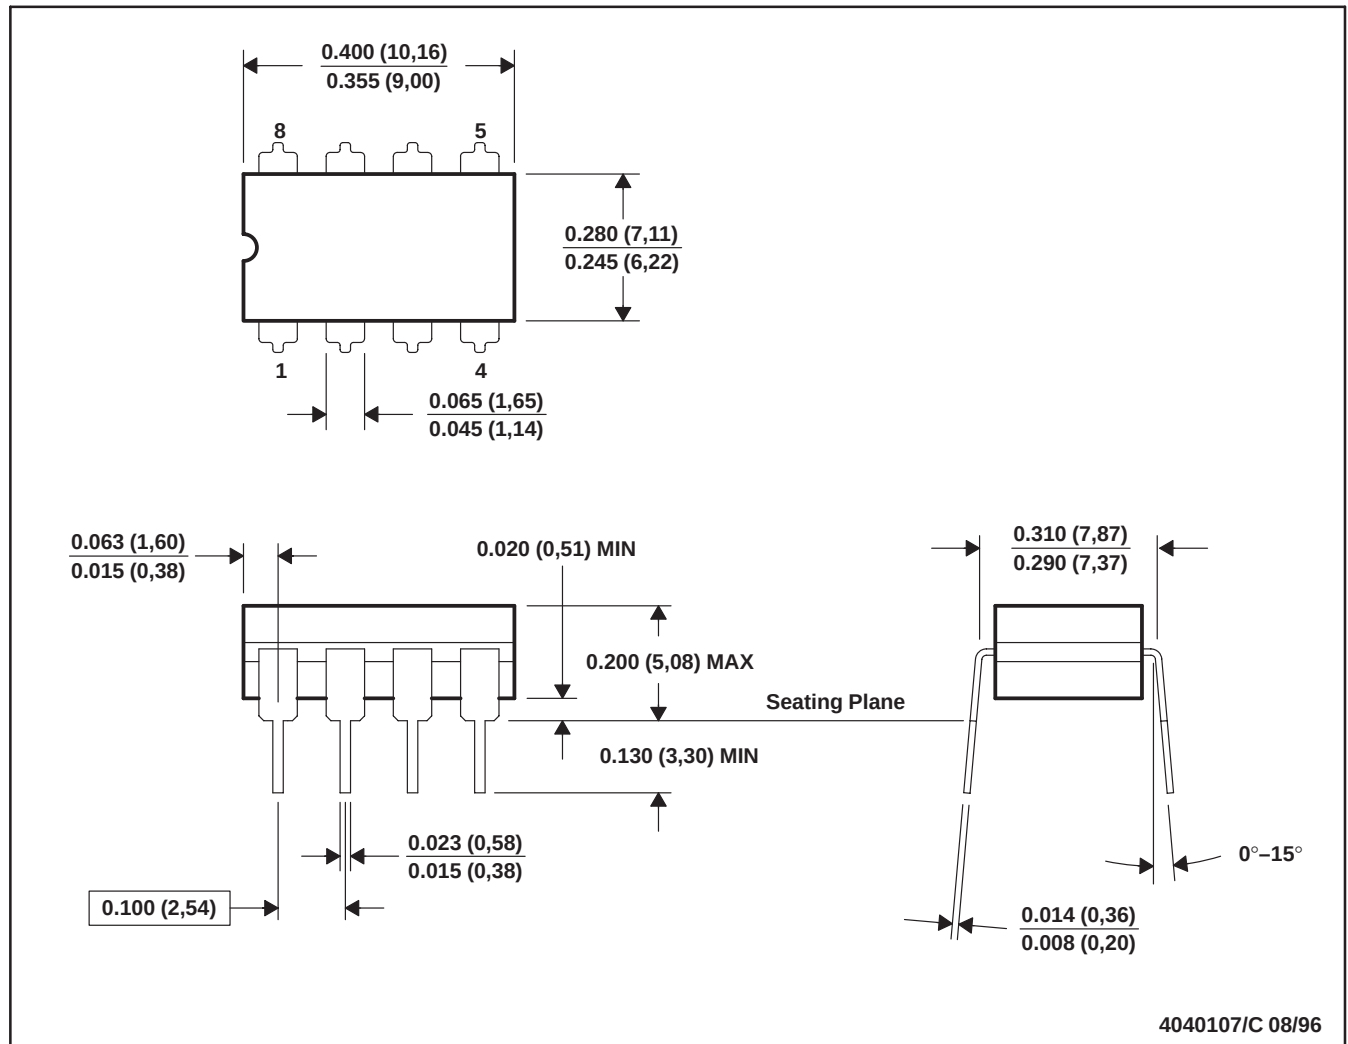


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification.
  - E. Falls within MIL STD 1835 GDIP1-T8



FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

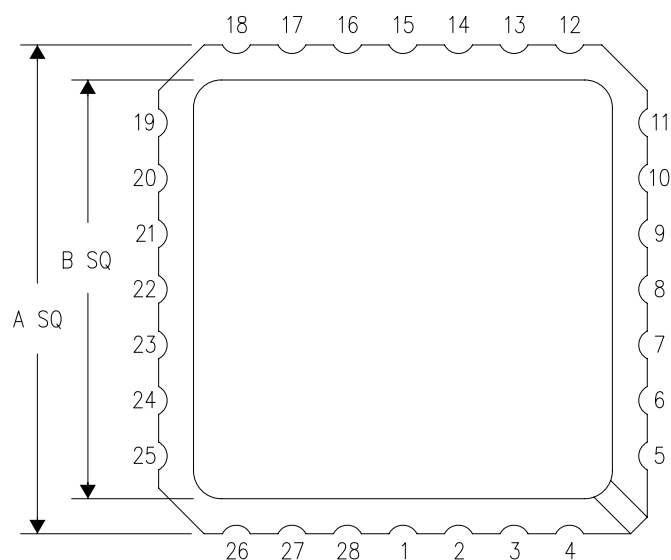

| NO. OF<br>TERMINALS<br>** | A                |                  | B                |                  |
|---------------------------|------------------|------------------|------------------|------------------|
|                           | MIN              | MAX              | MIN              | MAX              |
| 20                        | 0.342<br>(8,69)  | 0.358<br>(9,09)  | 0.307<br>(7,80)  | 0.358<br>(9,09)  |
| 28                        | 0.442<br>(11,23) | 0.458<br>(11,63) | 0.406<br>(10,31) | 0.458<br>(11,63) |
| 44                        | 0.640<br>(16,26) | 0.660<br>(16,76) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 52                        | 0.740<br>(18,78) | 0.761<br>(19,32) | 0.495<br>(12,58) | 0.560<br>(14,22) |
| 68                        | 0.938<br>(23,83) | 0.962<br>(24,43) | 0.850<br>(21,6)  | 0.858<br>(21,8)  |
| 84                        | 1.141<br>(28,99) | 1.165<br>(29,59) | 1.047<br>(26,6)  | 1.063<br>(27,0)  |

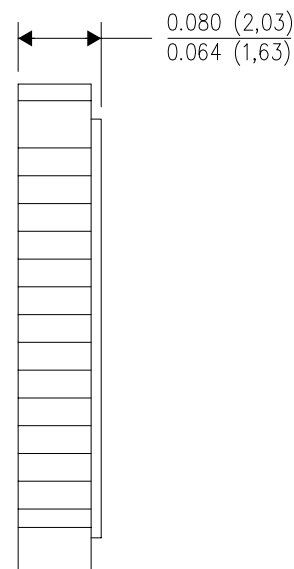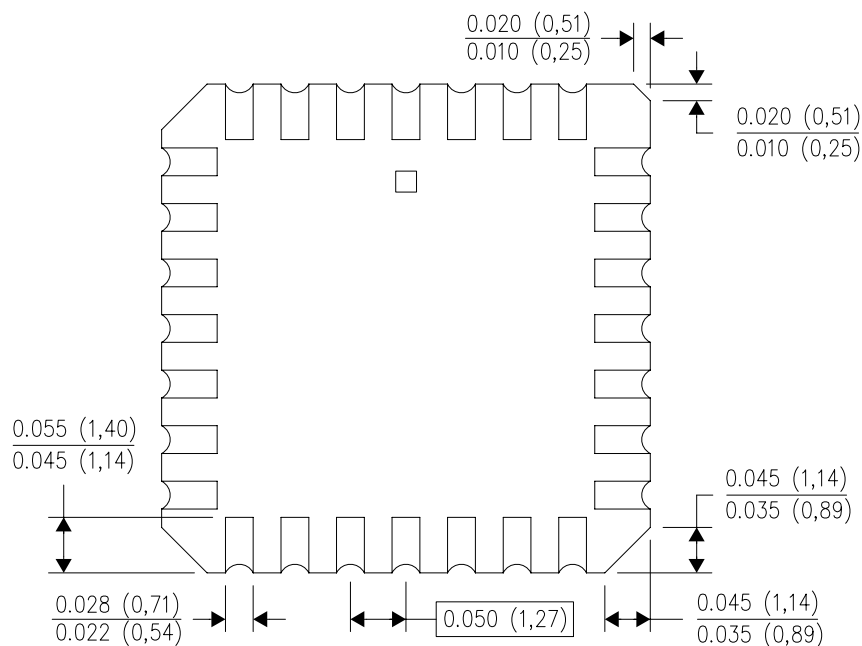


4040140/D 01/11

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a metal lid.
  - Falls within JEDEC MS-004

P (R-PDIP-T8)


PLASTIC DUAL-IN-LINE PACKAGE

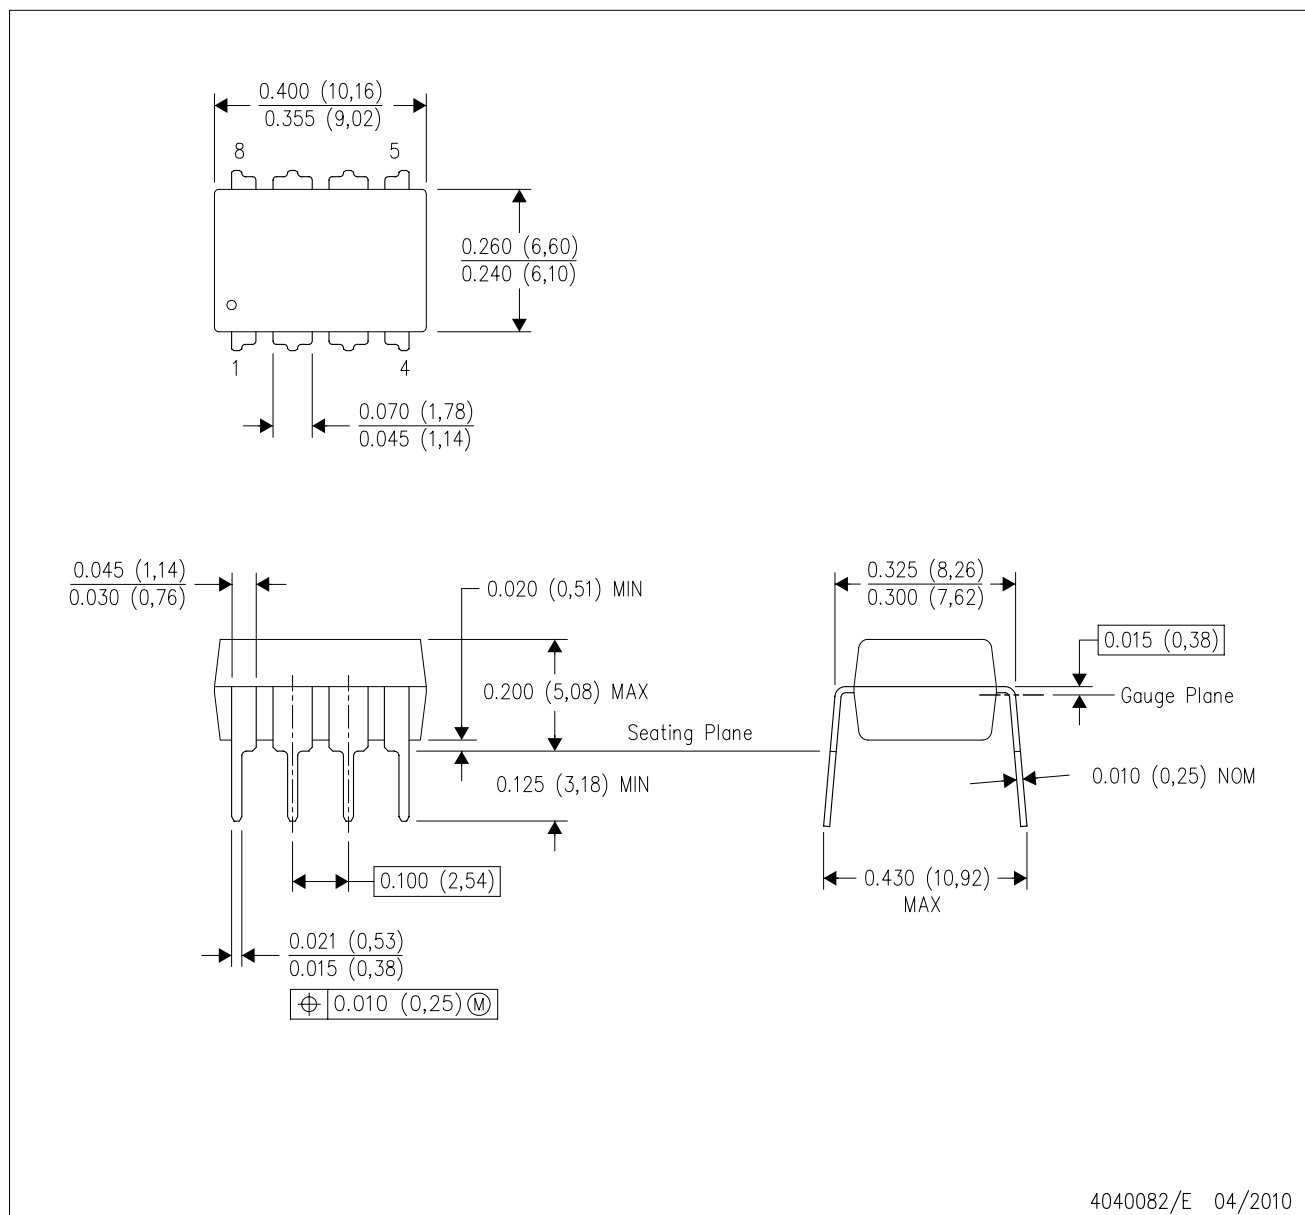

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001 variation BA.

DGK (S-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

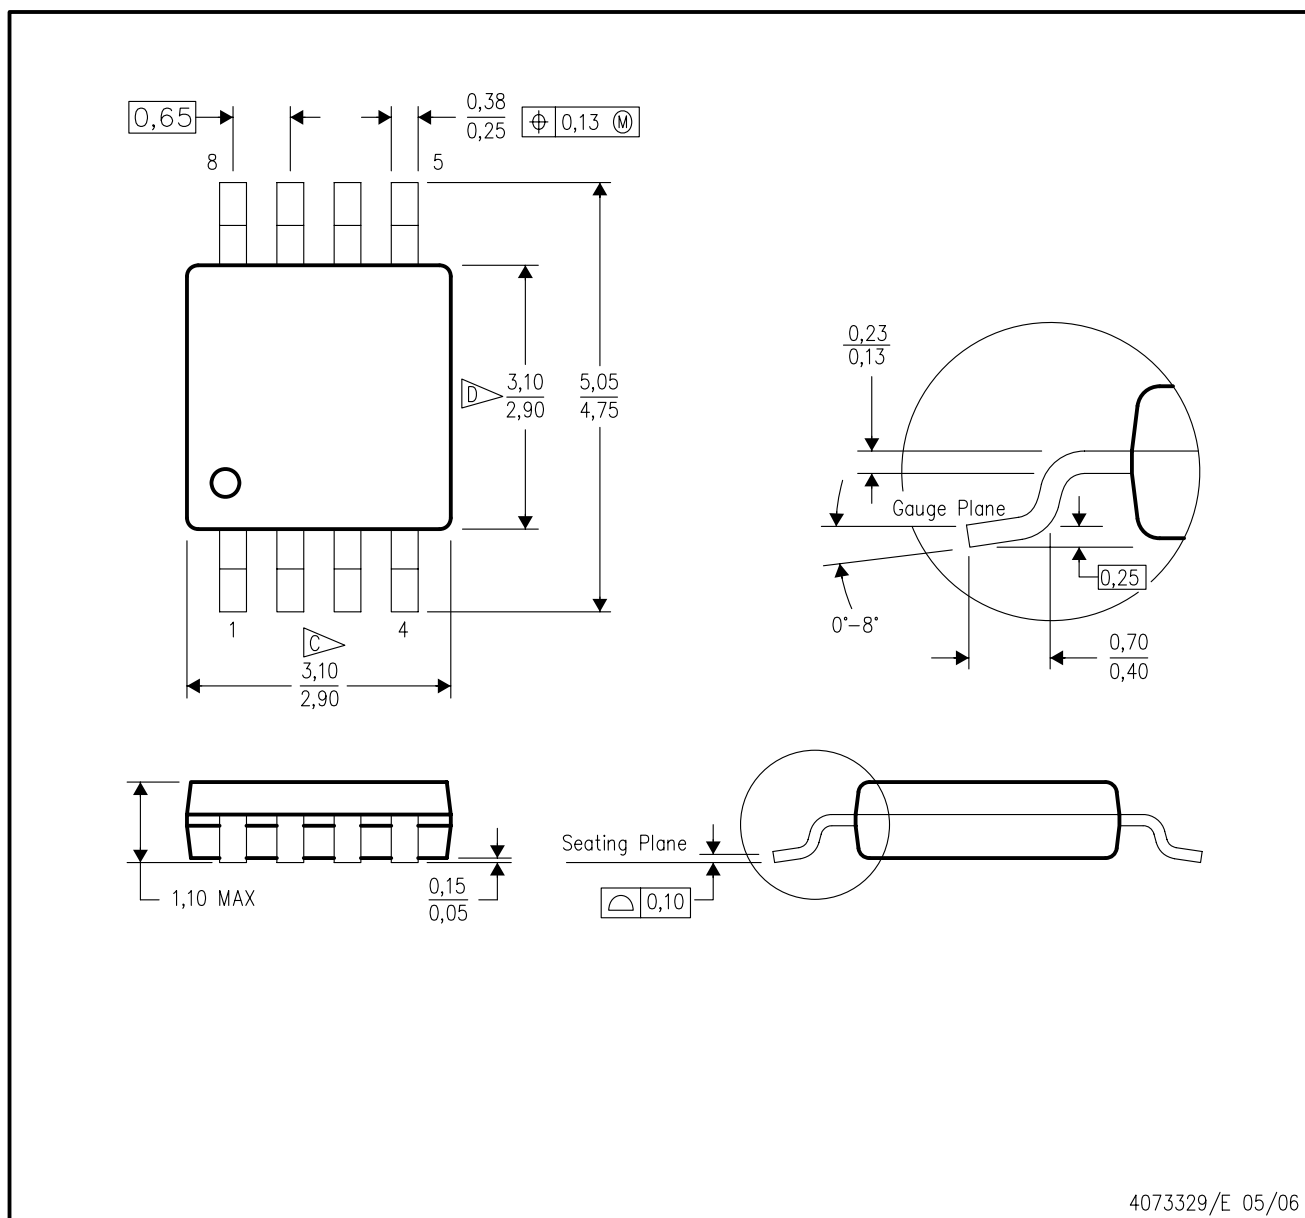


## NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
- E. Falls within JEDEC MO-187 variation AA, except interlead flash.



D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

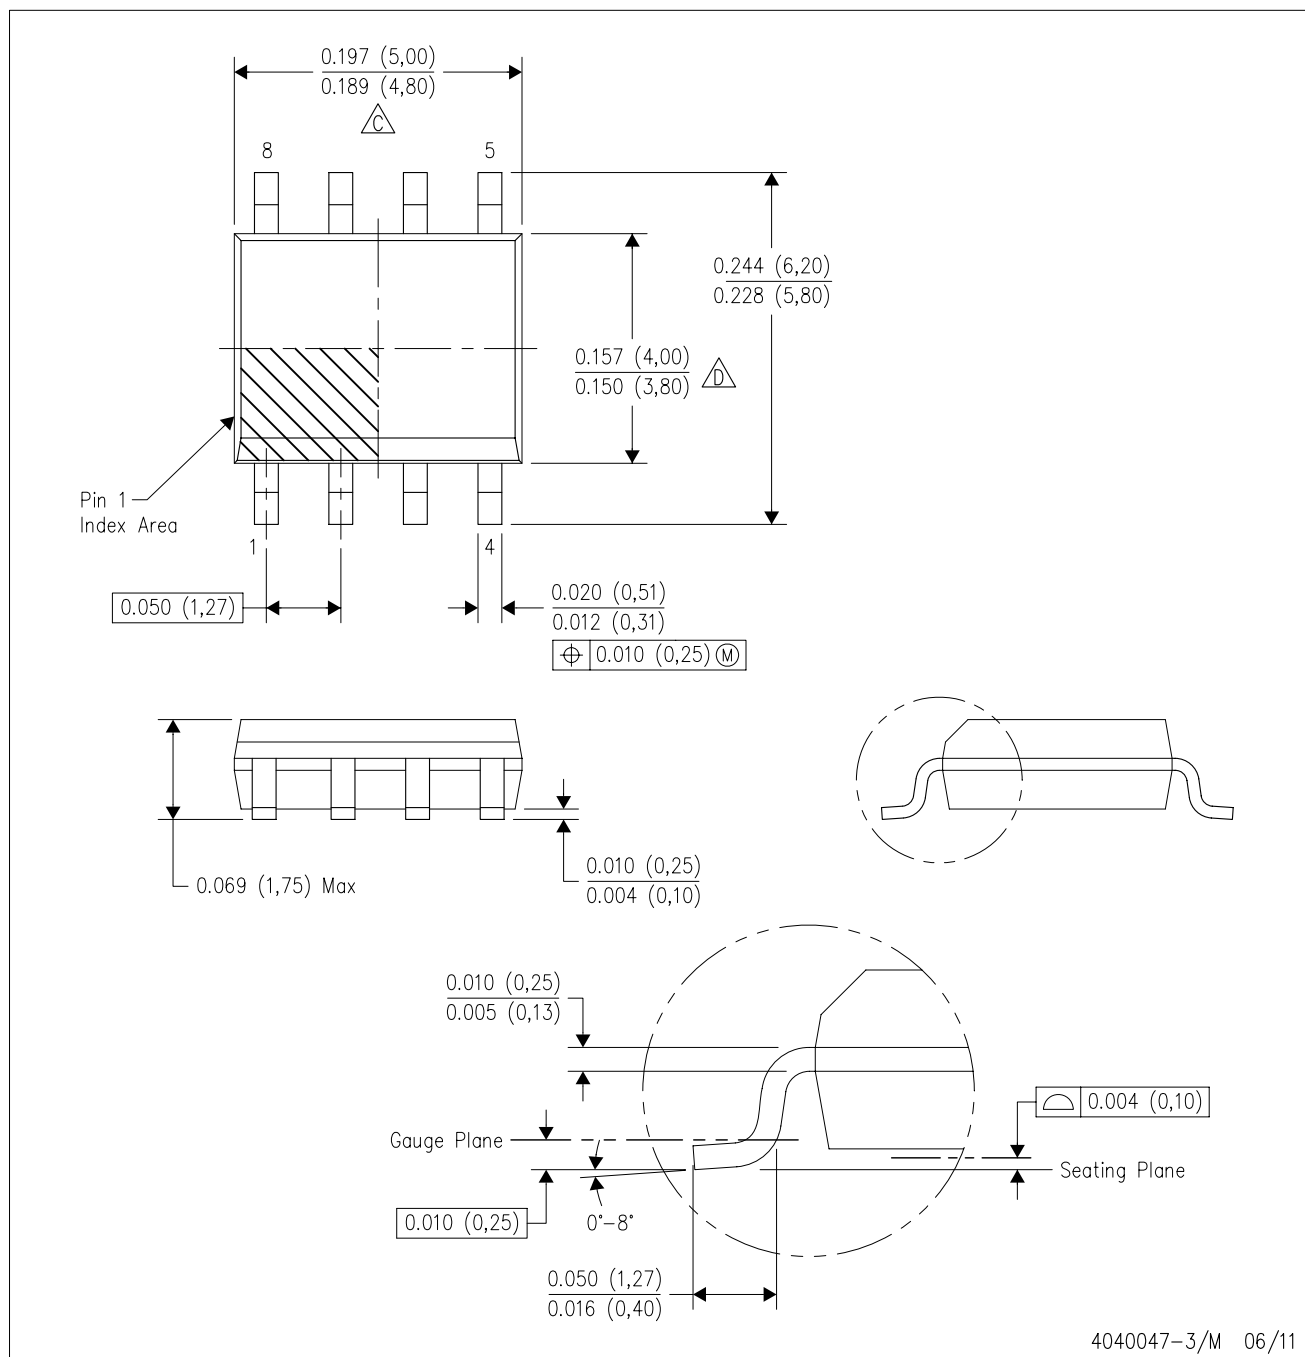


## NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- $\triangle C$  Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- $\triangle D$  Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

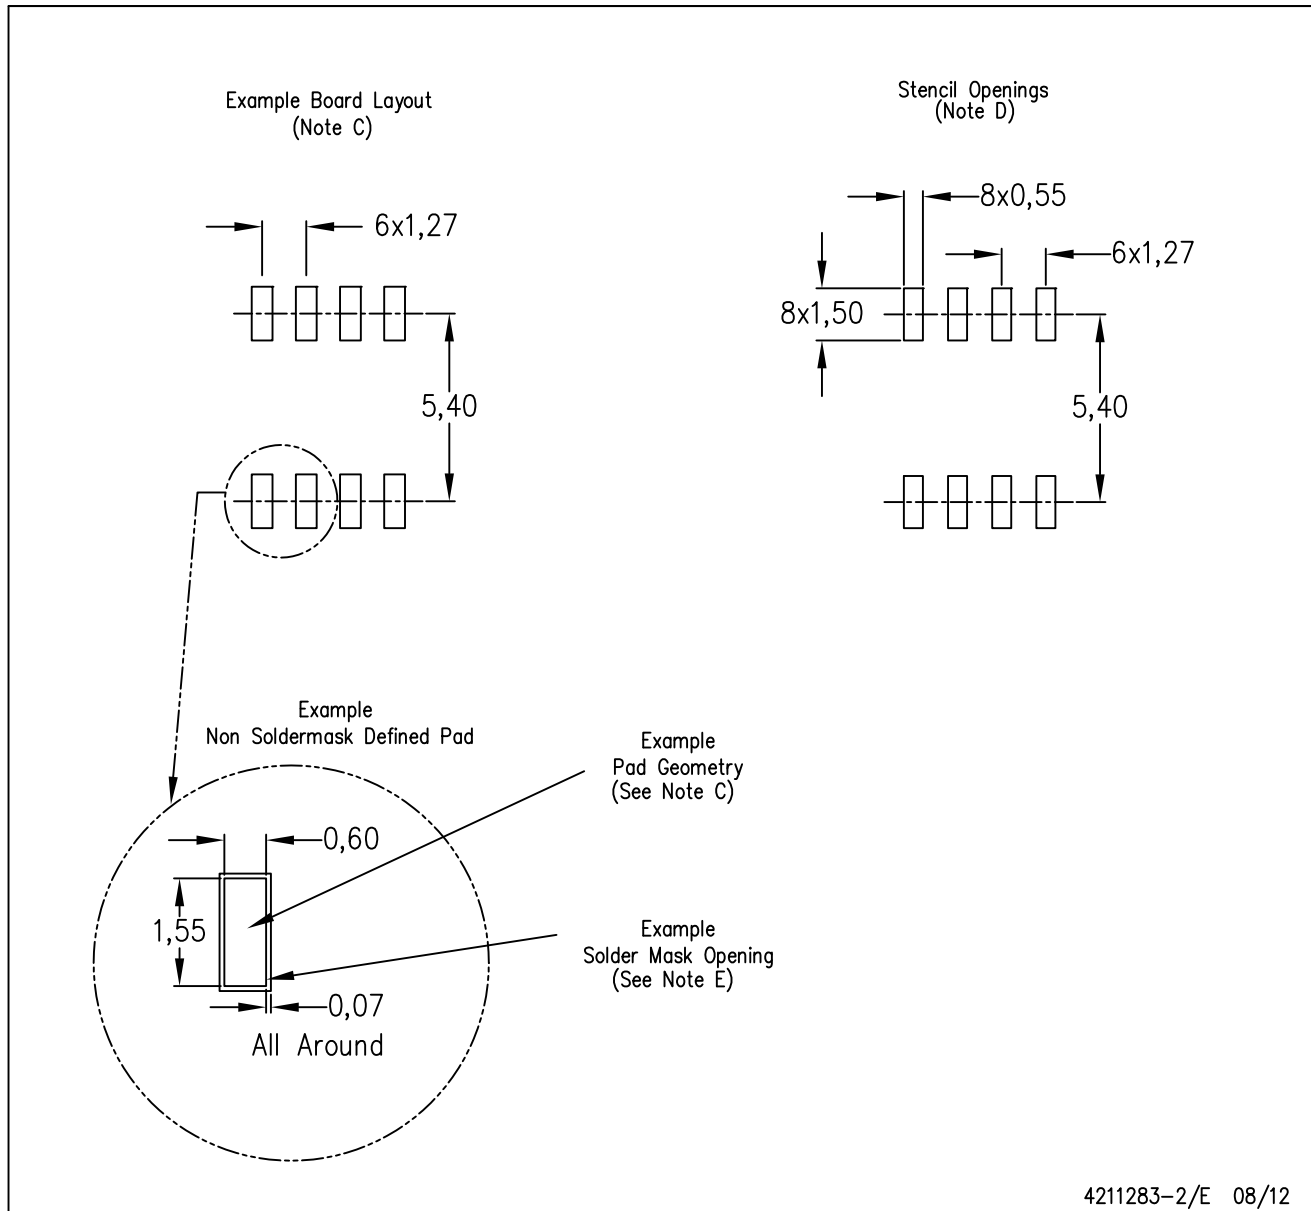


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

# MECHANICAL DATA

PS (R-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE

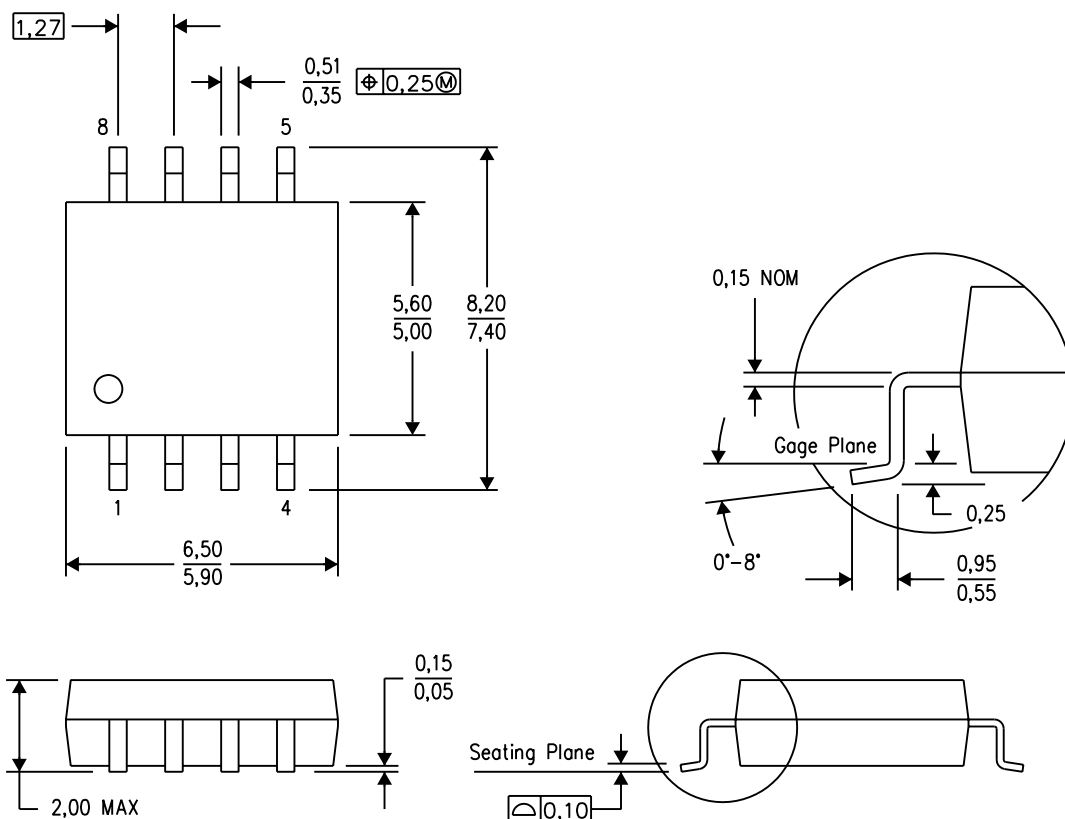


4040063/C 03/03

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.

PS (R-PDSO-G8)


## PLASTIC SMALL OUTLINE

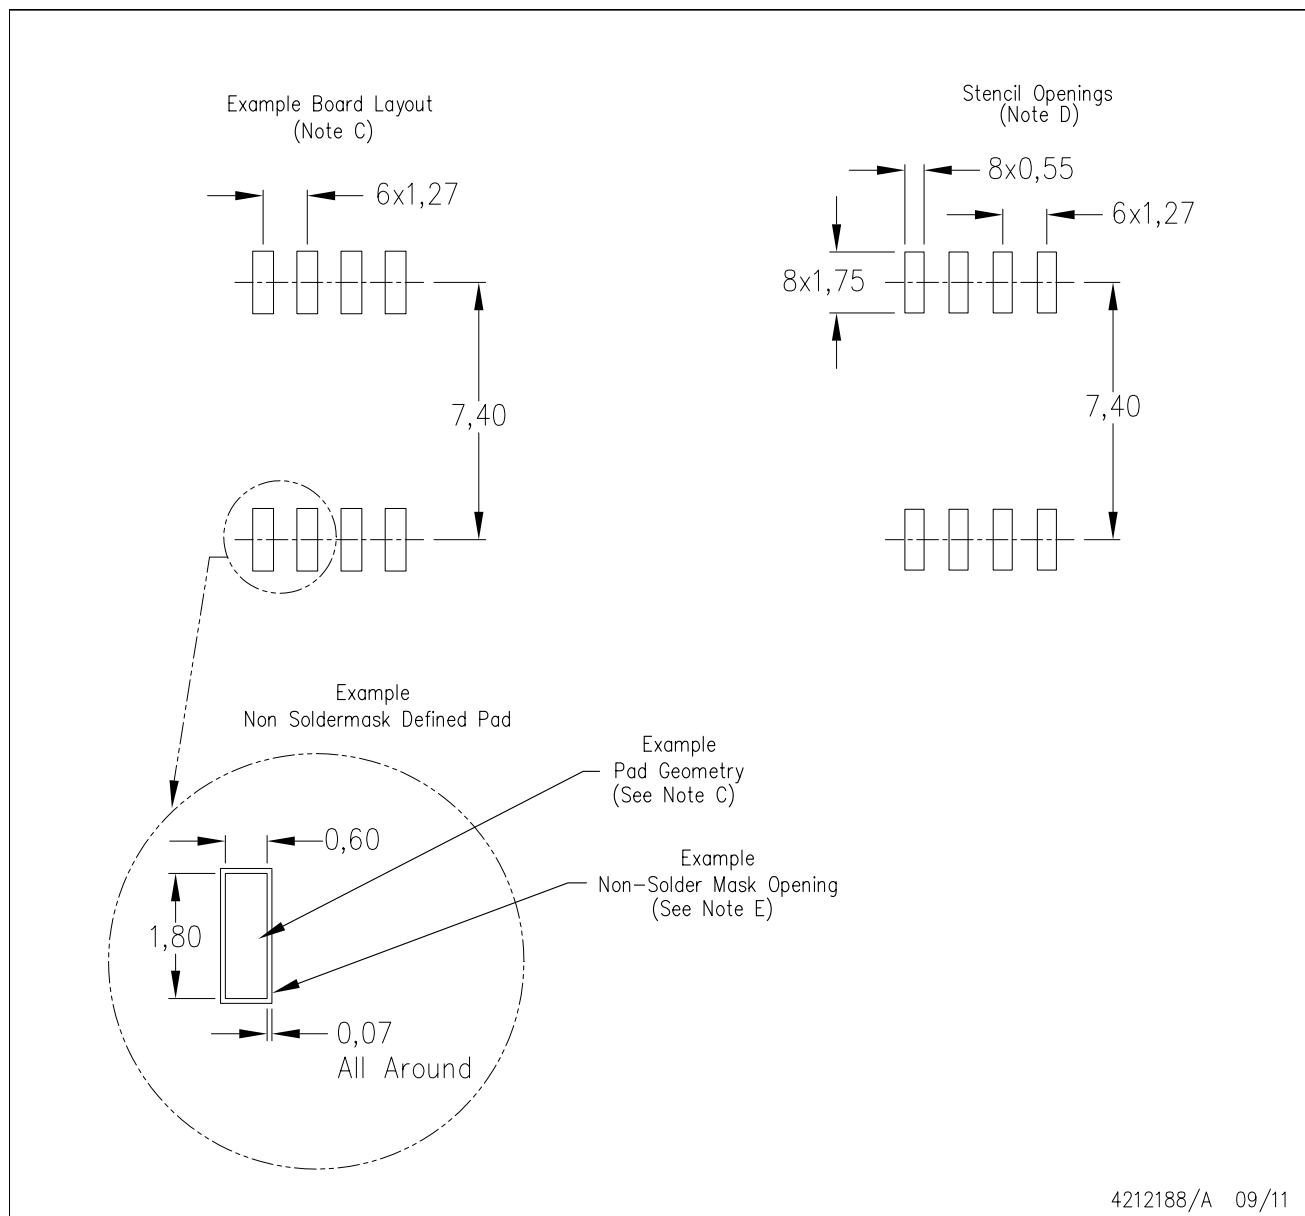

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G8)

PLASTIC SMALL OUTLINE

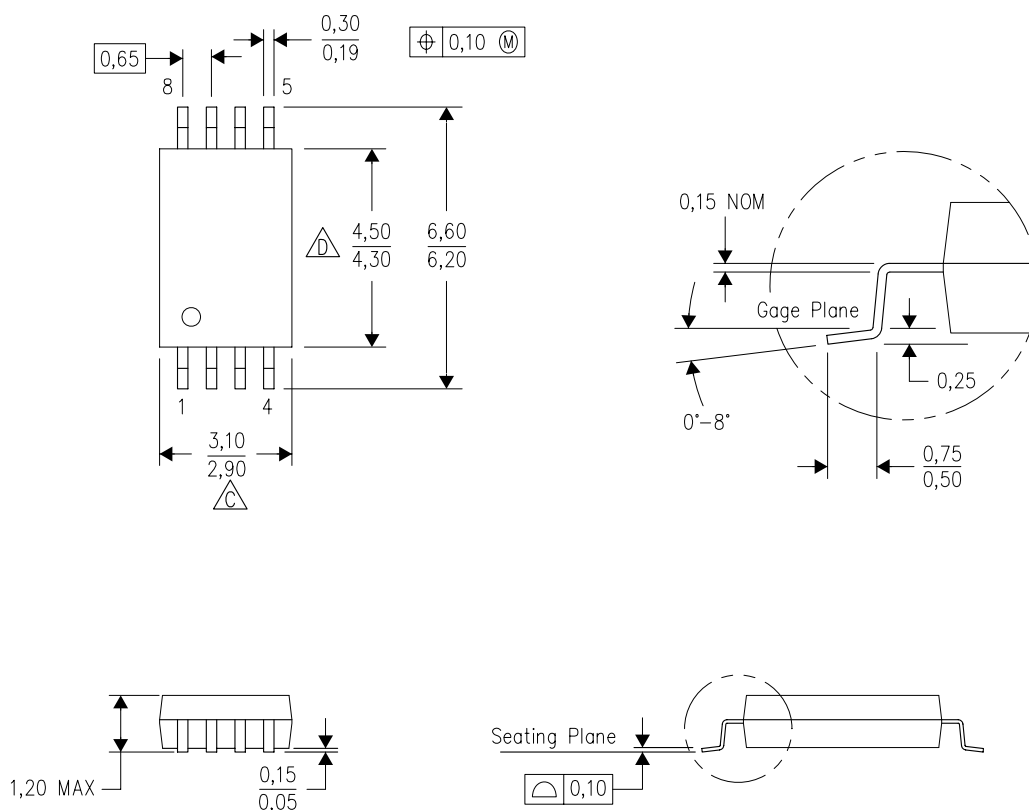

4040064-2/G 02/11

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

### Products

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| Audio                        | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                               |
| Amplifiers                   | <a href="http://amplifier.ti.com">amplifier.ti.com</a>                               |
| Data Converters              | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>                       |
| DLP® Products                | <a href="http://www.dlp.com">www.dlp.com</a>                                         |
| DSP                          | <a href="http://dsp.ti.com">dsp.ti.com</a>                                           |
| Clocks and Timers            | <a href="http://www.ti.com/clocks">www.ti.com/clocks</a>                             |
| Interface                    | <a href="http://interface.ti.com">interface.ti.com</a>                               |
| Logic                        | <a href="http://logic.ti.com">logic.ti.com</a>                                       |
| Power Mgmt                   | <a href="http://power.ti.com">power.ti.com</a>                                       |
| Microcontrollers             | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a>                   |
| RFID                         | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>                                 |
| OMAP Applications Processors | <a href="http://www.ti.com/omap">www.ti.com/omap</a>                                 |
| Wireless Connectivity        | <a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a> |

### Applications

|                               |                                                                                          |
|-------------------------------|------------------------------------------------------------------------------------------|
| Automotive and Transportation | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>                         |
| Communications and Telecom    | <a href="http://www.ti.com/communications">www.ti.com/communications</a>                 |
| Computers and Peripherals     | <a href="http://www.ti.com/computers">www.ti.com/computers</a>                           |
| Consumer Electronics          | <a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>                   |
| Energy and Lighting           | <a href="http://www.ti.com/energy">www.ti.com/energy</a>                                 |
| Industrial                    | <a href="http://www.ti.com/industrial">www.ti.com/industrial</a>                         |
| Medical                       | <a href="http://www.ti.com/medical">www.ti.com/medical</a>                               |
| Security                      | <a href="http://www.ti.com/security">www.ti.com/security</a>                             |
| Space, Avionics and Defense   | <a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a> |
| Video and Imaging             | <a href="http://www.ti.com/video">www.ti.com/video</a>                                   |

### TI E2E Community

[e2e.ti.com](http://e2e.ti.com)